

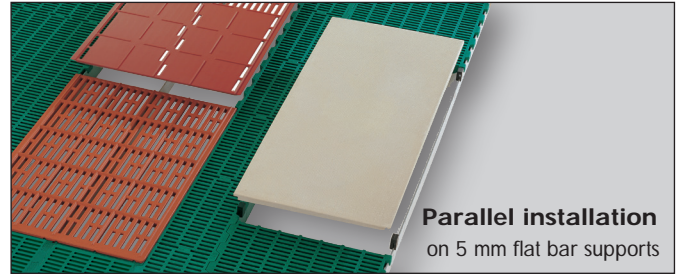



Installation diagrams for Poly-heat pads in farrowing pens and flatdecks

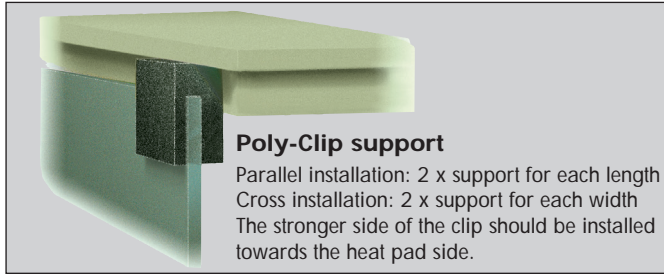

Assembly lengthways to support (for warm water and electrical heat pads)

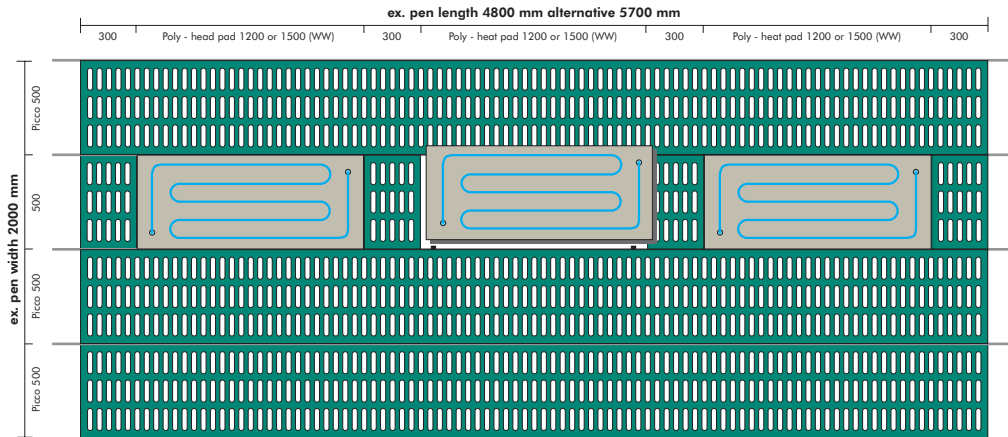

Assembly crossways to support (for warm water and electrical heat pads)

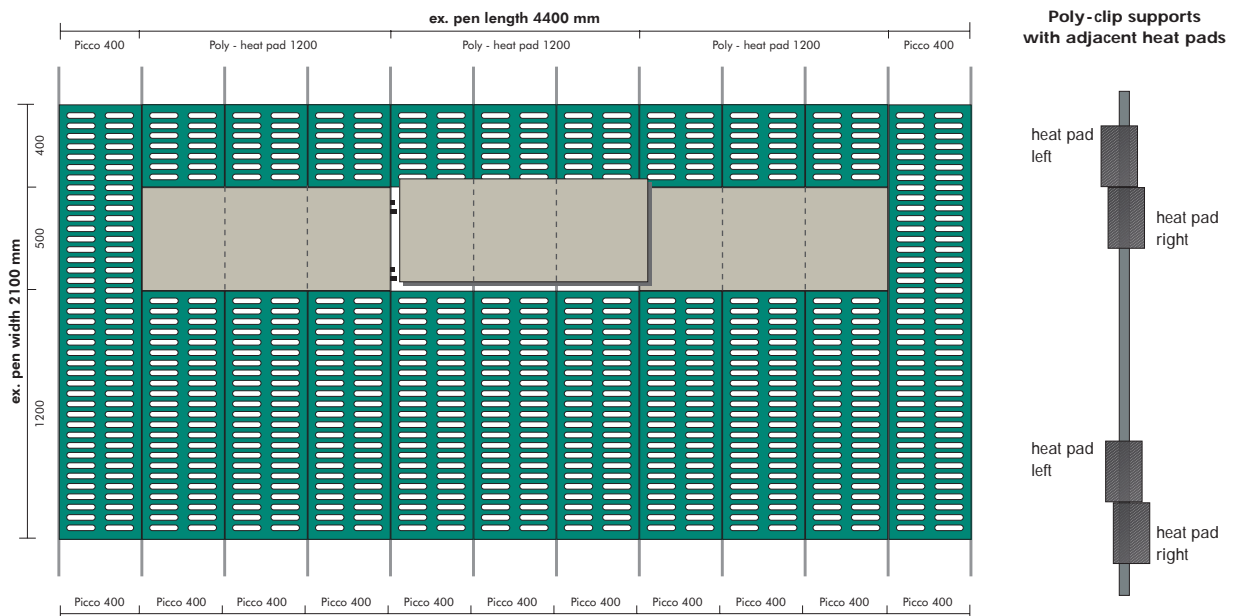

Electronic-controllers (for electrical Poly-heat pads)



Multi controller



Single controllers with controller box

controllers and accessories	indication	weight/ piece	prices on request
Controller 1	single controller	0.15 kg	
Controller 2	multi controller (for max. 10 x heat pads)	0.36 kg	
Box 6	controller housing, 6 times (for controller 1)	1.00 kg	
Box 12	controller housing, 12 times (for controller 1)	1.70 kg	
Sensor	replacement sensor	0.15 kg	

For electronic controllers the DIN / VDE 0100 requirements are to be followed.